


FILE NAME = D160M62-SHT-E49.dgn 1/8"

TOP VIEW



- 1. LIQUID TIGHT FLEXIBLE METAL
 CONDUIT, MAXIMUM LENGTH 6'-0", TYPICAL
 FOR EACH INSTANCE AS SHOWN, PROVIDE PVC
 COATED RIGID GALVANIZED STEEL CONDUIT AS
 REQUIRED NOT TO EXCEED 6'-0" OF FLEXIBLE
 LIQUID TIGHT METAL CONDUIT, LIQUID TIGHT
 FLEXIBLE METAL CONDUIT WILL BE INCLUDED
 IN THE COST OF THE CONDUIT ATTACHED TO
 STRUCTURE, OF THE CORRESPONDING DIA.,
 GALVANIZED STEEL, PVC COATED PAY ITEM
 EXCEPT THAT THE COST OF THE 34" DIA.
 RIGID STEEL CONDUIT AND 34" DIA. FLEXIBLE
 CONDUIT SHALL BE INCLUDED IN THE LUMINAIRE
 INSTALLATION.
- 2. UNDERPASS LUMINAIRE MOUNTED TO FACE OF PIER OR ABUTMENT WALL. MOUNTING HEIGHT OF 1" BELOW THE TOP OF PIER OR ABUTMENT WALL TYPICAL FOR ALL PIER/ABUTMENT MOUNTED UNDERPASS LUMINAIRES UNLESS OTHERWISE NOTED.
- 3. EXPANSION ANCHOR, POWDER ACTUATED FASTENERS WILL NOT BE ALLOWED. EXPANSION ANCHOR MUST BE SIZED IN ACCORDANCE WITH MANUFACTURERS REQUIREMENTS.
- 4. SECURE THE CONDUIT WITH PVC COATED CONDUIT CLAMPS OR CONDUIT BEAM CLAMPS AS SHOWN AT 5'-O" INTERVALS FOR LATERALS AND WITHIN 2'-O" MAXIMUM FROM ANY JUNCTION BOX, FLEXIBLE CONDUIT, OR CHANGE IN DIRECTION, ALL PVC COATED CONDUIT CLAMPS OR BEAM CLAMPS SHALL BE INCLUDED WITH THE COST OF THE "CONDUIT ATTACHED TO STRUCTURE, OF THE CORRESPONDING DIA., GALVANIZED STEEL, PVC COATED" PAY ITEM.
- 5. THE CONCRETE ENCASED CONDUIT TRANSITION SHALL BE INCLUDED IN THE COST OF THE GALVANIZED RIGID STEEL CONDUIT PAY ITEMS.
- 6. ALL CONDUIT ATTACHED TO STRUCTURE SHALL BE PVC COATED RIGID STEEL CONDUIT (PVCC RGC) TYPICAL.

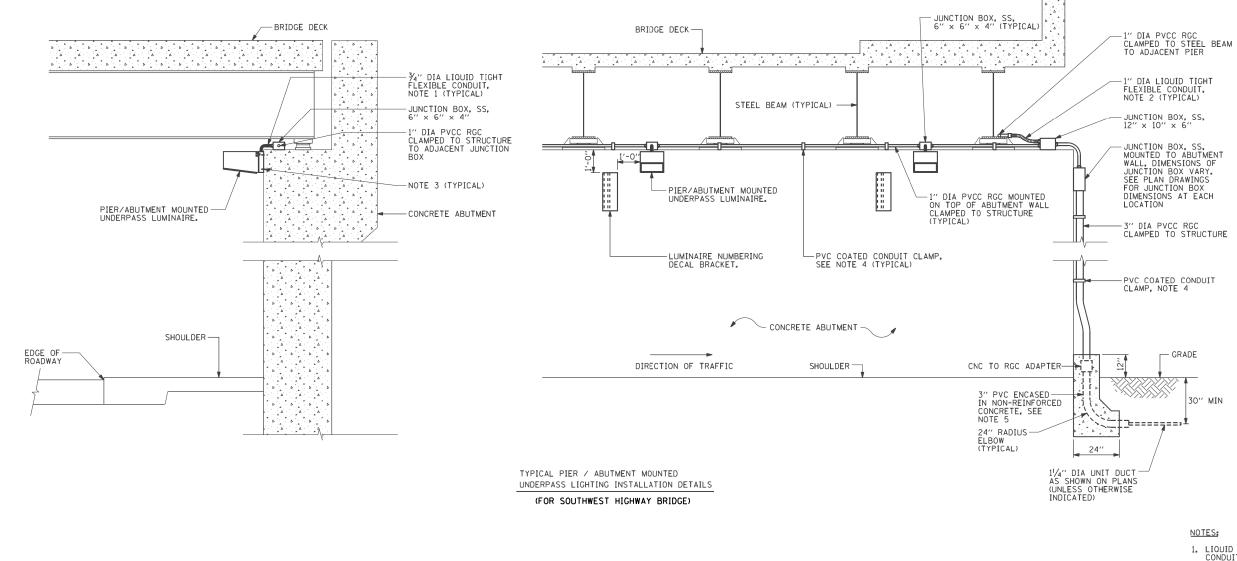



		~				
PVC COATED						
CONDI	CLAMP					
NOT	ТО	SCALE				

SCALE: NONE

USER NAME = Anthony_Plutz	DESIGNED	-	MAE	REVISED	-	
	DRAWN	-	WM	REVISED	-	ĺ
PLOT SCALE = 2.0000 '/ in.	CHECKED	-	DAD	REVISED	-	i
PLOT DATE = 3/13/2013	DATE	-	03/13/13	REVISED	-	L

L1" (TYPICAL)

ELEVATION

HEXAGON HEAD
BOLT 1/4" DIA
(3-REQUIRED)

-ANCHOR AS APPROVED BY ENGINEER

ALUMINUM BUSHING 1/2" LONG ALUMINUM BRACKET

LUMINAIRE NUMBERING DECAL BRACKET

NOT TO SCALE

STATE OF ILLINOIS	
DEPARTMENT OF TRANSPORTATION	

oo is (Enaminate none)				F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.			
	PIER /ABUTMENT MOUNTED UNDERPASS				330	103R-5 C00		778	373		
LUMINAIRE INSTALLATION DETAILS				E-49		CONTRACT	NO. (60M62			
	SHEET	1 OF	1	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT				